
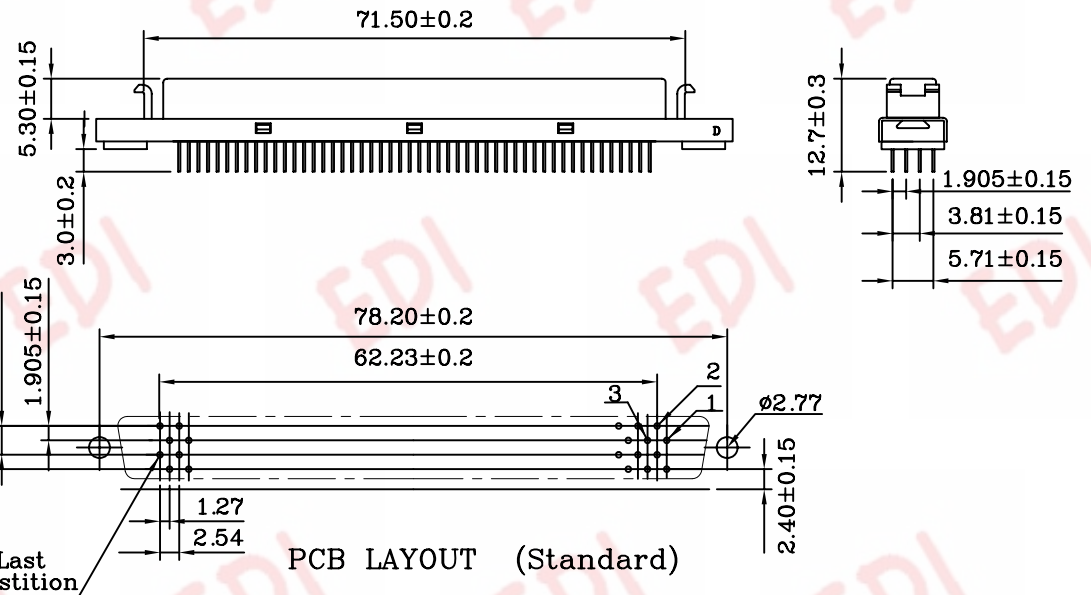


• **MATERIALS:(RoHS Compliant)**

- Housing : Plastic thermoplastic
P.B.T UL94V-0 black
- Contacts : Phosphor bronze gold
selective plated
- Front Shell : Steel Nickel Plated
over copper
- Bracket : Steel Nickel Plated
over copper

• **ELECTRICAL CHARACTERISTICS**

- Contact Current Rating: 1 Amp
- Dielectric Withstanding Voltage: 500V AC
- Insulation Resistance: 500MΩ/Min
- Contact Resistance: 35mΩ/Max
- Operation Temperature: -55°C~+105°C

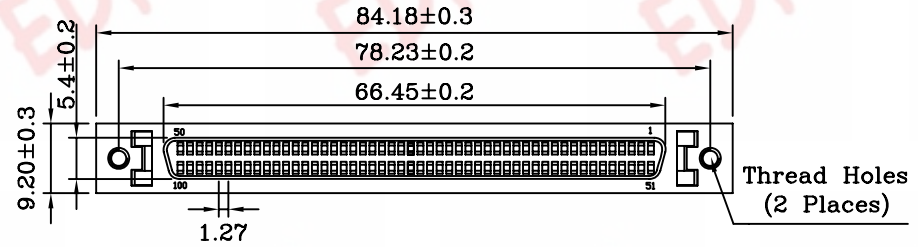

MDD 100 F L 1 3 2

- NO.OF CONTACT: 100 pos
- CONTACT TYPES: F = female
- OPTIONS: L =Latch block
- THREADED FINISHES: 1 =UNC #2-56
- CONTACT FINISHES: 3= 5u" gold selective plating, 5=15u" gold selective plating, 7=30u" gold selective plating
- P.C.BOARD PATTERN: 2= Standard footprint

1.27mm (.050") Pin Type 100Pos
Receptacles Headers Vertical
Mount Type

***符合 "RoHS" ***	零件	EDI-No.	Specification	Color	Qty
------------------	----	---------	---------------	-------	-----

EDI Electron Drive Index Co.,Ltd	CUSTOMER NO	PART NO	DRAW	APPROVER	DATE	UNIT	REV.	
		9-2-MDD100FL131	JULIE		98/09/18	mm	A	