
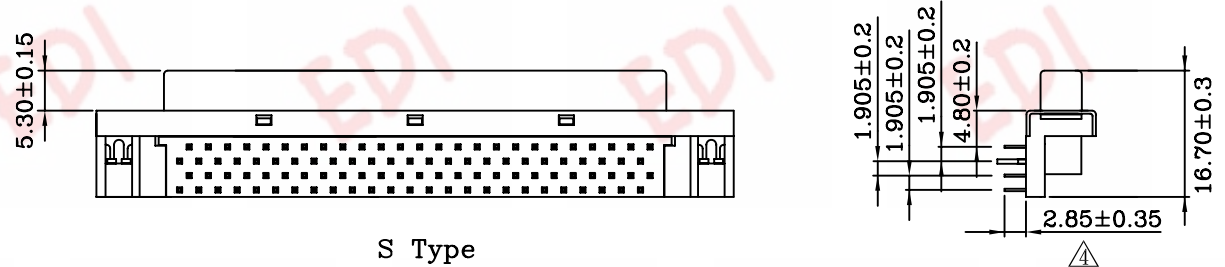


• **MATERIALS:(RoHS Compliant)**



Housing And Cover : Plastic thermoplastic
 P.B.T UL94V-0 black
 Contacts : Phosphor bronze gold
 selective plated
 Front Shell : Steel,Nickel Plated
 Over Copper
 Boardlock : Brass Tin Plated
 Over Copper

• **ELECTRICAL CHARACTERISTICS**

Contact Current Rating: 1 Amp
 Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: 500MΩ/Min
 Contact Resistance: 35mΩ/Max
 Operation Temperature: -55°C ~ +105°C

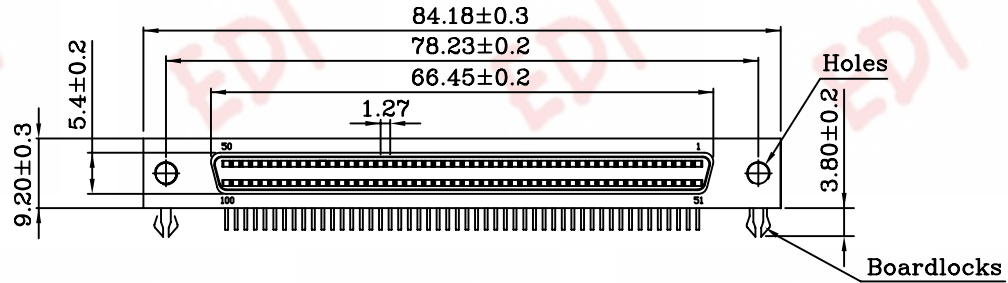

S Type

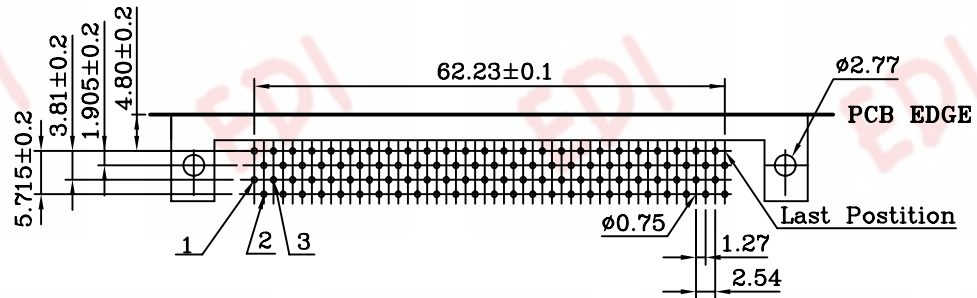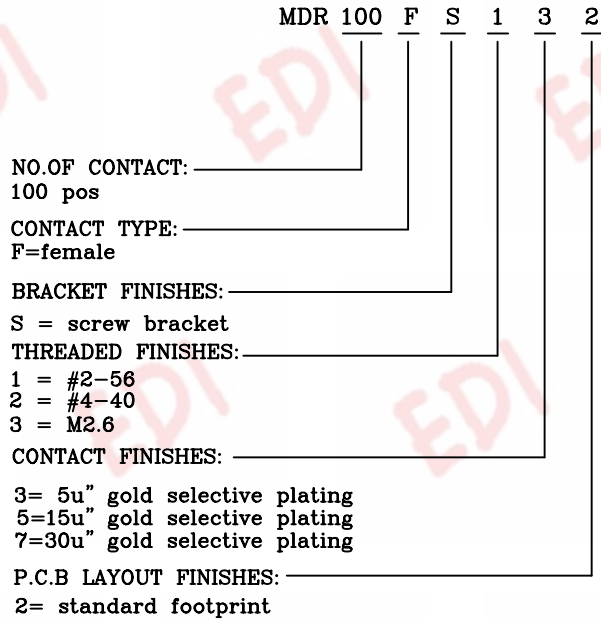

PCB LAYOUT

第 1 PIN在第二排

1.27mm (.050") Pin Type 100P
 Receptacles Headers Right-Angle
 Mount Type

4	2007.12.17	端子腳長度外露由2.70±0.25mm, 修改為2.85±0.35mm
3	2007.01.09	端子腳長度外露由2.85±0.2mm, 修改為2.70±0.25mm
2	2006.12.14	部分尺寸更正
1	2006.06.16	2006年圖面版本更正
NO.	DATE	MODIFICATION

***符合 "RoHS" ***	零件	EDI-No.	Specification	Color	Qty
------------------	----	---------	---------------	-------	-----

EDI Electron Drive Index Co.,Ltd

CUSTOMER NO	PART NO	DRAW	APPROVER	DATE	UNIT	REV.
	9-2-MDR100FSXX2	JULIE		98/08/21	mm	A

