


25042 Series

FEATURES:



- . 48 Circuits
- . Housing: PBT+30% Glass Filled UL 94V-0
- . Contact: Brass
- . Contact Plating: Gold Plating

SPECIFICATIONS:


- . Current rating: 2A
- . Temperatur range: -55°C ~+ 125°C
- . Contact resistance: 20mΩ max.
- . Mating Force: .93N max. per pin

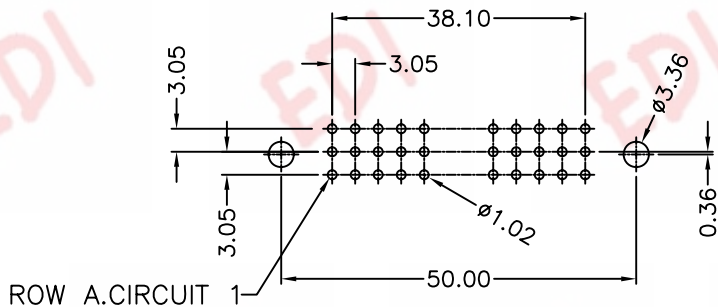

Recommended P.C Board Hole Layout

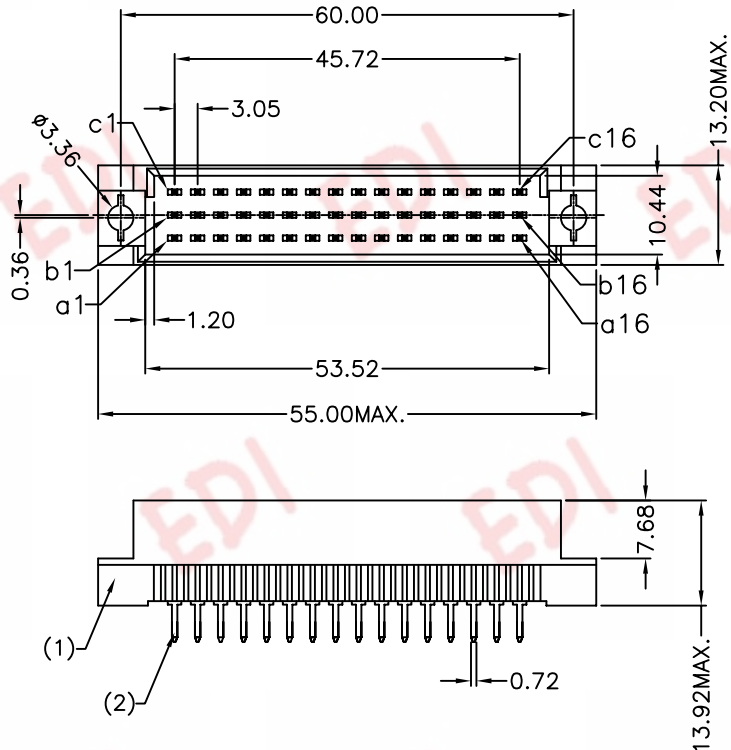

TOLERANCE	
X.X=±.20	X°=±2°
X.XX=±.10	X.X°=±1°
X.XXX=±.05	

			*** "RoHS" ***		零件		EDI-No.		Specification				Color		Qty		
EDI Electron Drive Index Co.,Ltd			CUSTOMER NO		PART NO		DRAW		APPROVER		DATE		UNIT		REV.		
					9-2-25042-48M2223-PB		LIANG				100/3/31		mm		A		